

A

B


C

D

5 VDS, 12 VDC OR 24 VDC EXTERNAL POWER SUPPLY REQUIRED. SIP RESISTER VALUE MUST MATCH THE INPUT VOLTAGE FOR EACH BANK OF 4 INPUTS

POWER SUPPLY REQUIRED ONLY WHEN USING MORE THAN 2 PLCADD1616 BOARDS

COMMUNICATION CABLE FROM OAK

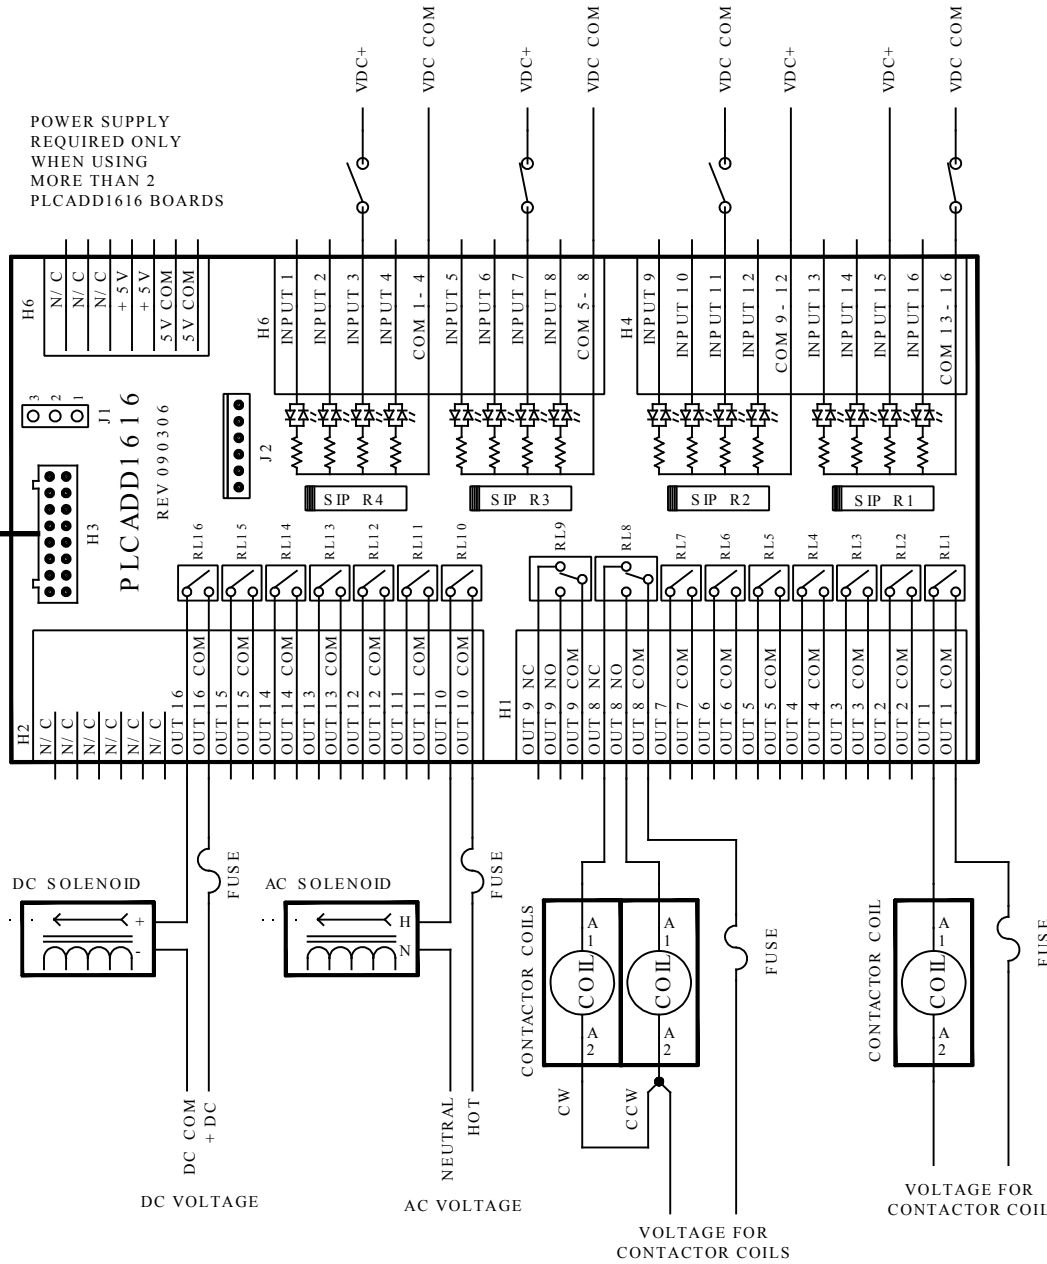

Title		
BOARD LEVEL, OAK, PLCADD1616 CIRCUIT		
Size	Number	Rev
A		
Date	150812	Drawn by 391 DRS
File name	OAK PLCADD16.dwg	Sheet 1 of 1

A

B

C

D